### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau



# 

#### (43) International Publication Date 7 July 2005 (07.07.2005)

PCT

#### (10) International Publication Number WO 2005/061804 A1

(51) International Patent Classification7:

E02D 27/01,

(21) International Application Number:

PCT/AU2004/001806

(22) International Filing Date:

22 December 2004 (22.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2003907151

23 December 2003 (23.12.2003)

(71) Applicant (for all designated States except US): THE AUSTRALIAN STEEL COMPANY (OPERATIONS) PTY LTD [AU/AU]; 650 Lorimer Street, Port Melbourne, Victoria 3207 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): O'GRADY, James, Francis [AU/AU]; 518 Ballarat Road, Sunshine, Victoria 3020 (AU).

(74) Agent: FREEHILLS PATENT & TRADE MARK AT-TORNEYS; Level 43, 101 Collins Street, Melbourne, Victoria 3000 (AU).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

[Continued on next page]

(54) Title: CAVITY FORMER

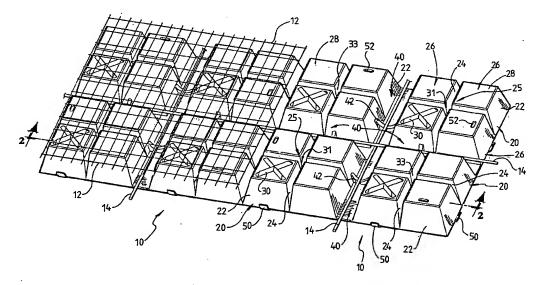

2005/061804 A1 III (57) Abstract: A cavity former for forming one or more cavities in a concrete slab, includes a hollow body (20) about which, during use of the former, poured concrete flows and subsequently cures to form a concrete slab in which the hollow body defines a cavity. The hollow body (20) has a first wall (27), a depending skirt wall (22) about the periphery of the first wall, and structure (24) defining, within the periphery, at least one depending hollow pillar formation (25) for in situ bracing the first wall to an underlying surface on which the skirt wall also rests.

## 

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.